

---

This Page Is Inserted by IFW Operations  
and is not a part of the Official Record

## **BEST AVAILABLE IMAGES**

Defective images within this document are accurate representations of the original documents submitted by the applicant.


Defects in the images may include (but are not limited to):

- BLACK BORDERS
- TEXT CUT OFF AT TOP, BOTTOM OR SIDES
- FADED TEXT
- ILLEGIBLE TEXT
- SKEWED/SLANTED IMAGES
- COLORED PHOTOS
- BLACK OR VERY BLACK AND WHITE DARK PHOTOS
- GRAY SCALE DOCUMENTS

**IMAGES ARE BEST AVAILABLE COPY.**

**As rescanning documents *will not* correct images,  
please do not report the images to the  
Image Problems Mailbox.**

**THIS PAGE BLANK (USPT)**



Europäisches Patentamt  
European Patent Office  
Office européen des brevets



(11) EP 0 705 994 A2

(12)

## EUROPEAN PATENT APPLICATION

(43) Date of publication:  
10.04.1996 Bulletin 1996/15

(51) Int Cl.<sup>6</sup>: F16F 7/12

(21) Application number: 95307043.0

(22) Date of filing: 04.10.1995

(84) Designated Contracting States:  
DE FR GB IT

(30) Priority: 04.10.1994 JP 264647/94  
22.12.1994 JP 336020/94

(71) Applicant: SUMITOMO CHEMICAL COMPANY,  
LIMITED  
Osaka (JP)


(72) Inventors:  
• Togawa, Yoshiaki  
Ichihara-shi, Chiba (JP)

• Matsumoto, Masahito  
Ibaraki-shi (JP)  
• Nagata, Makoto  
Ichihara-shi, Chiba (JP)  
• Yabe, Toru  
Ichihara-shi, Chiba (JP)

(74) Representative: Senior, Alan Murray  
J.A. KEMP & CO.,  
14 South Square,  
Gray's Inn  
London WC1R 5LX (GB)

### (54) Impact energy absorptive structure

(57) An impact energy absorptive structure is made of plastic materials suitable for moulding processing, and is designed to suit different degrees of impact loading anticipated in various applications. The impact energy absorptive structure is composed of a base member 11 and protruding rib members including long and short member, in which the proportion of the cross sectional area of the long rib members is between 0.3 to 0.8 of the total cross sectional area of the rib members. Other design modifications can be made readily to customize the impact resistance of the impact energy absorptive structures.

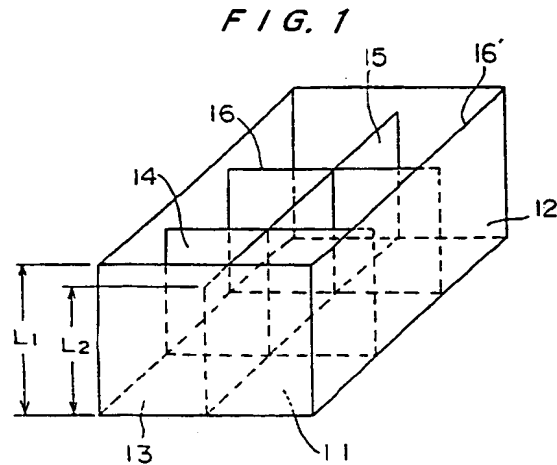

EP 0 705 994 A2

## Description

The present invention relates in general to internally mounted impact energy absorptive structures, such as in automobiles for protecting a crew when an impact loading is given from the outside, and relates in particular to an impact absorptive internal structures having controllable impact absorptive characteristics.

Impact absorbing structures are disclosed in, for example, Japanese Utility Model Application, Second Publication, H5-410, Japanese Utility Model Application, First Publication, H3-13251, Japanese Utility Model Application, First Publication, H3-49110 and Japanese Utility Model Application, First Publication, H3-49111, which are based on styrene or urethane foams disposed at certain strategic locations within a passenger automobile.

The type of construction used in these conventional impact absorbing structures is based on encasing impact absorbing members in plastic parts. Because of such dual structures, the final cost of the impact absorbing structures is high, and their assembly steps are also increased.

An approach to remedy such a problem is disclosed in documents such as Japanese Utility Model Application, First Publication, H4-128912, and Japanese Utility Model Application, First Publication, H6-72153 which disclose a structure in which plastic rib members themselves act as impact absorbing structural members.

However, the characteristics required for impact absorbing members should be different for different applications, and these publications do not disclose any specific designs for the rib structures to judge whether the impact absorbing structures can be customized to suit the conditions encountered in their applications.

It is an aim of the present invention to provide an impact energy absorptive structure whose impact resistance properties can be customized to the requirements of an application by providing a designing concept of specially shaped rib members.

Another aim of the present invention is to provide an impact energy absorptive structure having designs applicable to the application which can be manufactured by using conventional plastic materials.

According to the present invention there is provided an impact energy absorptive structure having a plurality of rib members for absorbing impact energy, said ribs protruding from a base member in a direction of expected impact loading and being shaped to suit an anticipated impact load to be absorbed by said impact energy absorptive structures.

The present invention can provide such a structure further comprising:

long rib members and short rib members;

wherein the ratio of the cross sectional area of the long rib members to the total cross sectional area of the long and short rib members, measured in a plane perpendicular to the direction of expected impact loading, is in a range between 0.3 to 0.8.

In such construction with the rib members made of long and short members, in the initial impact loading stage, the long rib members begin to collapse first before the short rib members are contacted with the impact loading. This design prevents a high initial peak of impact load during the initial contact of the impact loading with the energy absorbing member. By adjusting the initial impact loading cross sectional area of the long rib members to 0.3 to 0.8 of the total cross sectional area of the rib members, the initial peak of impact load may be lowered to the average load during the deformation of the impact energy absorptive structure. The interior members to be protected from extensive shocks therefore can be made to experience varying degree of subsequent moderate impact.

Another impact energy absorptive structure can be made by rib members having a constant width, and arranged in a uniform pattern as well as protruding from a base member, but the rib members are provided with a cut-out section so as to leave a cross sectional area of the members appropriate with anticipated impact loading. By choosing a proper size of the cut-out section, the impact energy to be absorbed can be adjusted to suit while maintaining the uniformity of loading on the base member itself. The regularly arranged rib member having a constant width is made to facilitate easy manufacturing to suit the application. The capacity of the impact absorptivity can thus be adjusted to suit the application.

A modification of the impact energy absorptive structures above-mentioned can be made by providing cut-out sections to be formed in accordance with a design on a plane parallel to a direction of impact loading.

In this case, the strength of a portion nearby the cut-out sections formed on the plane parallel to the direction of impact loading is intentionally weakened, therefore, when the impact loading is uniformly given, a deformation of said portion becomes greater than that of the other portion.

An aspect of the cut-out section is that it is provided by removing intersections of lattice points formed by the ribs, thereby enabling to provide a large amount of impact energy to be absorbed with a minimum creation of the cut-out sections.

An aspect of the cross sectional area of said rib members is that it varies in a designed pattern along the direction of impact loading.

The designed pattern mentioned above is such that an cross sectional area of the rib members increases from a tip portion of the rib members towards a base member of the impact absorptive structures. This structure has an effect

that low impact loads are absorbed at the tip of the rib members while high impact loads are absorbed by collapsing the structures close to the base member.

An aspect of the width of the rib members is that the width can be arranged to increase from the tip portion to the base member, to facilitate removal of the manufactured structures from the mold.

Another aspect of the impact energy absorptive structures is that a constant cross sectional area may be utilized in a direction of impact loading,

thereby providing a relatively constant resisting force of the collapsing impact energy absorptive structures.

An aspect of the rib members is that they may be shaped so that a thickness of the rib member decreases from a base member towards a tip portion of the rib members and is provided with a cut-out section having a width which increases from the tip portion of the rib members towards the base member. This type of construction facilitates mold making while providing constant resistance of the collapsing impact energy absorptive structures.

A modification of the impact energy absorptive structures above-mentioned is such that a width of the rib members increases from a tip portion of the rib members towards a base member, which would provide increasing resistance of the collapsing impact energy absorptive structures.

Another modification of the impact energy absorptive structures provides: a base member; and a plurality of intersecting rib members for absorbing impact energy by deformation of the rib members which is made of a resin integrally with the base member and protruding from the base member in a uniform arrangement in a direction of impact loading, wherein a cut-out section is provided to a designed location of the rib members so as to adjust impact absorptive characteristics of the impact energy absorptive structures.

By providing properly chosen cut-out sections within the energy absorbing member, it is possible to customize the resistance properties of the collapsing impact energy absorptive structures.

An aspect of the impact energy absorptive structures is that the cut-out section is formed in accordance with a design on a plane parallel to a direction of impact loading.

The cut-out section may be provided by removing intersections of lattice points formed by said rib members.

The cut-out section may be formed in a direction of impact loading.

An aspect of the cut-out section is that it may be provided with a cross sectional area which vary in a designed pattern along a direction of impact loading.

An aspect of the designed pattern is designed so that the cross sectional area of the intersecting rib members increases from a tip portion of said rib members towards the base member.

An aspect of the impact energy absorptive structures above-mentioned is that a width of the rib members increases from the tip portion towards the base member.

An aspect of the impact energy absorptive structures above-mentioned is that the designed pattern is a constant cross sectional area in a direction of impact loading.

A final aspect of the impact energy absorptive structures as represented in the basic structure and all its modifications is that the cross sectional area of the rib members can be chosen to suit an anticipated impact load absorbed by the impact energy absorptive structures.

The material for making the impact energy absorptive structures of the present invention is preferably a thermoplastic resin. The material may be chosen from thermoplastic resins such as polyethylene, polypropylene, polyvinylchloride, nylon, polycarbonate, polyethylene-terephthalate, PMMA ABS resins and their modifiers, polymer alloy or their mixtures. Among these, polyolefin resins such as homopolymers of ethylene and/or propylene, or copolymers of them with other copolymerizable components such as alpha-olefin are preferred, and polypropylene resins are even more preferable.

Especially preferable is a thermoplastic resin composition comprising components (A) and (B) as defined next. The component (A) is an ethylene-propylene block copolymer containing 10 to 30 % by weight of an ethylene-propylene copolymer portion having ethylene content of 20 to 60 % by weight, preferably 30 to 50 % by weight. The component (B) is either an ethylene-propylene copolymer rubber or an ethylene-butenel-1 copolymer rubber. In said thermoplastic resin composition of components (A) and (B), the amount of (A) may range between 80 to 100 % by weight and the corresponding remaining amount of (B) may range between 20 to 0 % by weight. The total amount of the component (B) and the ethylene-propylene copolymer portion in the component (A) is 15 to 40 % by weight, per 100 % by weight of the sum of the components (A) and (B). The melt index (MI) of said thermoplastic resin composition of components (A) and (B) is 5-50 g/10min., preferably 10-35 g/10min.

Such a thermoplastic resin or thermoplastic resin composition may contain fillers, such as talc, mica and glass fiber, and conventional additives, such as antioxidants, UV absorbers, anti-flammable agents and coloring agents, as needed.

The invention will now be described by way of example and with reference to the accompanying drawings in which:

FIG. 1 is a schematic drawing of a first embodiment (PE1) of the impact energy absorptive structures of the present invention;

FIG. 2 is a schematic drawing of a first comparison example (CM1) of the impact energy absorptive structures;  
FIG. 3 is a schematic drawing of a second embodiment (PE2) of the impact energy absorptive structures of the present invention;

FIG. 4 is a schematic drawing of a third embodiment (PE3) of the impact energy absorptive structures of the present invention;

FIG. 5 is a schematic drawing of a fourth embodiment (PE4) of the impact energy absorptive structures of the present invention;

FIG. 6 is a schematic drawing of a fifth embodiment (PE5) of the impact energy absorptive structures of the present invention;

FIG. 7 is a schematic drawing of a sixth embodiment (PE6) of the impact energy absorptive structures of the present invention;

FIG. 8 is a schematic drawing of a second comparison example (CM2) of the impact energy absorptive structures;

FIG. 9 is a schematic drawing of a seventh embodiment (PE7) of the impact energy absorptive structures of the present invention;

FIG. 10 is a schematic drawing of an eighth embodiment (PE8) of the impact energy absorptive structures of the present invention;

FIG. 11 is a graph showing the results of impact absorbing tests for the impact energy absorptive structures of the present invention; and

The PE 1 to PE8 and CM1 to CM2 are shown in Tables 1 and 2.

Embodiments 1 to 5 were developed based on a first series of experiments. In the drawings for the following embodiments, the structure of the impact energy absorptive structures is presented schematically and the thickness of the various structures is not shown in the drawings. In all cases, impact loading is applied vertically and the top of the structures is the first point of contact with an impact load.

FIG. 1 is the structure of the impact energy absorptive structures (shortened to IAS hereinbelow) of embodiment 1. The IAS shown in FIG. 1 comprises the rib members having a constant width arranged in a uniform lattice pattern and protruding from a base member. The lattice pattern is designed as a 2x3 lattice configuration. That is, an IAS comprises the lattice including a base member 11, longitudinal side plates (outer rib) 12 and transverse side plates (outer rib) 13 protruding vertically from the base member 11, a middle plate (inner rib) 15 parallel to the side plates 12, and middle plates (inner rib) 14 parallel to the side plates 13. The middle plates 14, 15 are shorter than the side plates 12, 13.

The rib length (height) is denoted as L1 for the side plates 12, 13, and as L2 for the middle plates 14, 15. The rib length L1 and L2 are 60 mm and 55 mm, respectively. This design was adopted so as to absorb impact load in two-stages. The thickness of the rib members is such that the thickness of the tip portion 16 is 0.8 mm, and 1.5 mm at the base member, forming a slight taper from the base member to the tip portion. This is a limitation necessarily imposed by the need to remove the IAS from the mold used in injection molding process for manufacturing the IAS. The inter-cell spacing is 35 mm.

The material for manufacturing of the IAS was in a form of pellets comprising the ethylene-propylene block copolymer containing 28 % by weight of ethylene-propylene copolymer portion which has ethylene content of 40 % by weight. The melt index (MI) of the pellets is 15 g/10 min. The proportion of the cross sectional area of the long rib members is 0.59 of the total cross sectional area of the rib members of the IAS.

The ethylene content was determined according to the IR spectrum method described in "Polymers Handbook" pp. 256 to 257, (ii) Block Copolymers" published by Asakura Publishing, 1985.

The following Table 1 shows the results of impact strength tests carried out on the samples made in embodiments samples (PE) 1 to 5 compared with a comparison sample (CM) 1.

Impact strength tests were conducted by using Instrumented multiaxial impact loading tester (Dart Drop Graphic Impact Tester, Model A, Toyo Seiki Co. Ltd.). The load was measured with a load cell, and the dart tip was modified to a disk loader having 120 mm in diameter and 10 mm in thickness). The load of 6.4 Kg was dropped from a height of 1.5 m, producing an initial impact velocity of 5.4 m/s.

Table 1

Sample No.	Av. Load	Ini. Peak Value	Max. Def. Load
PE1	4400	4600	4700
CM1	4600	7400	4900
PE2	3500	4000	3500
PE3	3200	3100	3500
PE4	4200	4500	6600
PE5	4000	3100	6400

Notes: PE (preferred embodiment); CM (comparison) Av. Load (average load) Ini. Peak Value (initial peak value); Max. Def. Load (load at maximum deformation). All values in newtons.

In Table 1, the average load refers to an average of the readings taken with the load cell, and the initial peak value refers to a peak load reading during the initial impact loading stage. Load at maximum deformation refers to a load reading, which was registered by the load cell, at the time of maximum deformation.

In PE1 (FIG. 1), the process of impact energy absorption begins at the tip portion 16' of the side plates 12, 13 receiving the first impact loading. In this condition, the tip portions 16 of the middle plates 14, 15 have not yet made contact with the loading surface. Therefore, only the side plates 12, 13 receive the load. The cross sectional area of said rib members 12, 13 resisting the deformation is small, and plastic deformation occurs quickly to absorb the initial peak of impact load to provide quick protection to human body.

FIG. 2 is the structures of CM1. The structures of CM1 is such that for the base member 11 there are side plates 12, 13, middle plates 14, 15 but the dimension of their lengths (heights) is uniformly 60 mm. Other dimensions of CM1 are the same as those for PE1, as are the material and manufacturing method. The result in Table 1 shows that CM1 exhibited a higher initial peak of impact load under identical testing conditions.

FIG. 3 shows the IAS of PE2. This IAS has the rib members of 0.8 mm thickness distributed uniformly in a lattice pattern, and a cut-out section (or vacant region) is provided by removing intersections lattice points formed by the middle plates 14, 15 shown in FIG. 1. The vacant region is defined by the dimensions B1 for the regions of the middle plate 14 and B2 for the regions of the middle plate 15. The structures also comprises a base member 11, side plates 12, 13, the latter two are the same as those shown in FIG. 1. The cross sectional area of the rib members are designed to absorb the energy of the anticipated impact load. The material and the method of manufacturing of the IAS is the same as those in PE1.

An advantage of PE2 is that the thickness of the rib members and the spacing of the lattice can be adjusted to suit the anticipated impact loading. The thickness of the rib members has a certain lower limit for convenience of the manufacturing process. Impact loading is received by the base member 11, so the rib spacing or the lattice spacing cannot be made too large and certain spacing is required. By removing portions defined by B1 and B2 in the middle plates 14 and 15 to reduce the cross sectional area, it becomes possible to provide a resisting area to adjust the resisting strength of the IAS to suit the magnitude of the anticipated impact loading. By providing the vacant region, intersections of lattice points of the middle plates 14, 15 are removed and the result is a reduction in the initial peak of impact load.

The results of testing PE2, carried out under the same conditions as for PE1, shown in Table 1, indicate that the average load decreased, consistent with decreased cross sectional area of the IAS, and its initial peak of impact load also decreased.

FIG. 4 shows the IAS of PE3. This IAS has the same vacant-centers, B1 and B2 as in PE2, and the lengths (heights) L2 of the rib members 14, 15 are made shorter as in PE2. The side plates 12, 13 are the same as in PE1 and PE2.

The results of testing PE3, carried out under the same conditions as for PE1, shown in Table 1, indicate that the average load decreased, consistent with the decreased cross sectional area of the IAS, and the initial peak of impact load is equal to the average load value. The properties of the IAS of PE3 is as if a mixture of the IASs of PE1 and PE2.

FIG. 5 shows the IAS of PE4. This IAS has a latticed-configuration of side plates 12, 13 as in PE1 and has a vacant center such that the rib members of 0.8 mm in thickness at the tip portion protruding from the base member 11 are uniformly arranged. The shape of the rib members is such that the width C1 at the tip portion is narrower than the width C2 at the base member. The material and the manufacturing method are the same as in PE1.

The cross sectional area of the rib members is designed so as to absorb impact loading gradually increased. The shape is suitable to increasing resistance of the rib members as the deformation progresses, which represents a desirable impact absorbing behaviour of the IAS. The vacant-regions B1, B2 of the middle plates 14, 15 and the changing dimensions from C1 to C2 combine to produce a desirable impact absorbing behavior. The results of testing PE4, under the same conditions as in other samples, reported in Table 1, demonstrate that the initial peak of impact load is reduced while offering high energy absorption.

FIG. 6 shows the IAS of PE5. This IAS has a latticed-configuration of side plates 12, 13 as in PE1 and has a vacant center such that the rib members of 0.8 mm in thickness at the tip portion protruding from the base member 11 are uniformly arranged. The shape of the rib members is such that the width C1 at the tip portion is narrower than the width C2 at the base member. The rib lengths (heights) L2 of the middle plates 14, 15 is made short as in PE1. The material and the manufacturing method are the same as in PE1.

The cross sectional area of the rib members is designed to offer increasing resistance to deformation as the impact loading is applied and the structures collapse. By providing the vacant regions B1, B2 and making the middle rib members 14, 15 short, initial peak of impact load is reduced. By increasing the rib width gradually from C1 to C2 and thereby increasing the cross sectional area, a desirable pattern of impact resistance can be obtained.

Table 1 presents the results of testing PE5 under the same conditions of testing for all others.

Next, a second series of testing IASs having a second basic configuration shown in FIGS. 7 to 8 will be explained with specific reference to PE6, PE7 and PE8. The difference between the first and second series IASs is that in the second series IASs have a rib length (height) of 80 mm, the thickness of tip portion of 0.6 mm and a lattice configuration of 2x2. The facts that the thickness of the tip portion of the rib members is smaller than that at the base member, that an expanding tapered shape of the rib members is towards the base member, other dimensions, material and the manufacturing methods are the same as in the first series.

FIG. 7 shows a structure of the IAS of PE6. The IAS of PE6 has side plates (outer rib) 12A of length (height) L1, middle plates (inner ribs) 14A of length (height) L2 where  $L1 > L2$ . The proportion of the cross sectional area of the long rib members is 0.3 of the total cross sectional area of the rib members which corresponds to PE1 in the first series, and the effects of the rib members in offering resistance to deformation are the same as PE1.

Table 2 shows the results of impact testing of IASs of second series. The testing apparatus was basically the same as that used in testing the first series, but the impact loading was higher. The load of 20.0 Kg was dropped from a height of 1.0 m, producing an initial impact velocity of 4.5 m/s. This series is made to be applicable where the impact energy overall is higher than that in the first series, and the corresponding maximum deformation was 40 mm compared with 20 mm in the first series.



Table 2

Sample No.	Av. Load	Ini. Peak Value	Max. Def. Load
PE6	2300	2400	3500
CM2	2600	4300	3500
PE7	1600	1500	1700
PE8	1700	1600	2000

Notes: PE (preferred embodiment); CM (comparison) Av. Load (average load) Ini. Peak Value (initial peak value); Max. Def. Load (load at maximum deformation). All values in newtons.

FIG. 8 shows the results obtained by CM2 tested under the same conditions as those for PE6, and the comparison is equivalent to CM1 in the first series. In this IAS, the height L1 of all the rib members (side plates 12A and middle plates 14A) is 80 mm. The test results in Table 2 show that CM2, as well as CM1, exhibited a higher initial peak of impact load than the average load. In contrast, the peak of impact load in PE6 is held down low while the value of the load at maximum deformation for both PE6 and CM1 were the same.

FIG. 9 shows the IAS of PE7. The basic structure of PE7 is the same as that of PE6, thus the thickness of the rib members decreases gradually from the base member 11 towards the tip portion 16. A feature which has been added to PE7 is that a cut-out section (vacant space) 17 has been added such that the width of the cut-out section 17 increases gradually from the tip portion 16 to the base member 11 as seen in FIG. 9. The dimensions of the cut-out section 17 is determined so that an increase in the cross sectional area caused by the increasing thicknesses of the rib members 12A, 14A is compensated by having the cut-out section 17, thus maintaining approximately a constant cross sectional area of the rib members in the direction of impact loading.

The above-noted structure of PE7 presents an advantage that the load does not increase during the deformation process of the rib members caused by an impact loading. This is thought to be the result of approximately constant cross sectional area presented along the direction of impact loading, and therefore the load required for collapsing of the rib members does not increase noticeably.

The results of testing PE7 under the same test conditions as PE6 and CM2 are presented in Table 2. For PE7, the average load is lower which is consistent with the decrease in the cross sectional area, and the initial peak of impact load is further reduced in comparison to PE6. The load at maximum deformation for PE7 is lowered further in comparison with PE6 and CM2. This is because the cross sectional area of the regions close to the base member 11 does not increase as the deformation process is continued, consequently the collapsing strength is maintained constant throughout the impact loading process.

FIG. 10 shows the IAS of PE8. Similar to the design of PE7, this structure is also provided with a cut-out section 18 on rib members 12A so that the width of the cut-out section 18 increases towards the base member 11 to control the variation of the cross sectional area in the deformation process. The cut-out 18 is not provided on the interior rib members but only on the rib members 12A which constitute the wall section of the IAS of PE8. This is a choice made so as to facilitate manufacturing, by inserting a core of a shape to correspond with the shape of the cut-out 18 into an injection mold.

The cut-out 18 provided only on the outer walls performs an equivalent function as the cut-out 17 which is provided on all of the rib members, therefore, the size of cut-out 18 is made to be comparatively large.

The results of testing PE8 under the same test conditions as PE6 are reported in Table 2. For PE8, the average load is lower which is consistent with the decrease in the cross sectional area, and the initial peak of impact load is between that of PE6 and PE7. It is thus noted that the performance of PE8 is somewhere between those of PE6 and PE7.

FIG. 11 is a graph which summarizes the results of impact testing of preferred embodiments PE1 to PE8. Here, the average cross sectional area of the rib members ( $\overline{S(x)}$ ) is an average of the cross sectional area ( $S(x)$ ) of the rib members as a function of the displacement ( $x$ ) along the direction orthogonal to the base member. The average load ( $\overline{F(x)}$ ) is an average value of the load ( $F(x)$ ) detected by the load cell as a function of the displacement ( $x$ ). According to this graph, it can be seen that the correspondence between  $\overline{S(x)}$  and  $\overline{F(x)}$  during impact testing is excellent. Therefore, by using these results, it is possible to calculate an average cross sectional area to correspond to a certain impact load, and to present suitable impact resisting structures to suit an application. Further, the rib members collapse with time, therefore, the displacement ( $x$ ) is also a function of time. Therefore, the cross sectional area under load and the load change with time ( $t$ ). FIG. 11 shows that cross sectional area ( $S(t)$ ) and the load ( $F(t)$ ) also exhibit a correlation. In other words, by controlling the time-dependent cross sectional area of the rib members which collapse under load, it is possible to obtain a pattern for the time-dependent impact resistance strength ( $F(t)$ ).

For instance, an example of the impact energy absorptive structures is a requirement for a constant impact resistance pattern for  $F(t)$ , in which case, it is possible to design the rib members so that  $S(t)$  becomes constant over the time period of application of an impact loading.

The conceptual framework of the present invention has thus been demonstrated that an impact loading can be absorbed in a multi-stage collapsing mode in which the impact energy absorbed by the rib member can be varied during the collapsing of the impact energy absorptive structures so as to present a customized absorption to suit an application. The concept was illustrated with reference to preferred embodiments and specific examples, but other designs and combinations are obviously possible. For example, the concept illustrated in FIGS. 3 to 6 can be applied to combinations represented by embodiments shown in FIGS. 7, 9 and 10 to generate a suitable IAS of optimum performance.

Further, the above embodiments were based on uniformly spaced rib members of square shape in a lattice configuration. However, the rib members need not be restricted to square shaped lattice configuration, and other shapes such as a triangle or a hexagonal shape can be utilized equally effectively.

It should be obvious that the numerical values for the sizes and the shapes pertaining to these IASs should be chosen in association with their structure, end use and manufacturing methods. The method of manufacturing need not be limited to injection molding, and compression molding may be used equally effectively.

In all the preceding embodiments, the rib members protrude from a flat base member and the contact region on the rib members is also flat, but it is obvious that both the base member and the contact region can assume curved shapes to suit end use applications.


## Claims

1. An impact energy absorptive structure having a plurality of rib members for absorbing impact energy, said ribs protruding from a base member in a direction of expected impact loading and being shaped to suit an anticipated impact load to be absorbed by said impact energy absorptive structure.
2. A structure according to claim 1 comprising:
  - long rib members and short rib members;
  - wherein the ratio of the cross sectional area of the long rib members to the total cross sectional area on the long and short rib members, measured in a plane perpendicular to the direction of expected impact loading, is in a range between 0.3 to 0.8.
3. A structure according to claim 1 or 2 wherein:
  - the rib members have a constant width and are arranged in a uniform pattern; and
  - a plurality of cut-out sections are provided in said rib members so that the cross sectional area of said rib members provides an absorptivity for impact loading.
4. A structure according to claim 3, wherein said cut-out sections are formed in a plane parallel to a direction of expected impact loading.
5. A structure according to one of claims 3 or 4, wherein said cut-out section is provided by removing intersections of lattice points formed by said rib members.
6. An impact energy absorptive structure according to any one of the preceding claims, wherein the cross sectional area of said rib members varies in a designed pattern along the expected direction of impact loading.

EP 0 705 994 A2

7. A structure according to claim 6, wherein said designed pattern is designed so that the cross sectional area of said rib members increases from a tip portion of said rib members towards the base member.
8. A structure according to claim 6 or 7 wherein the width of the rib members increases from a tip portion towards the base member.
9. A structure according to claim 6, wherein said designed pattern is a constant cross sectional area in the direction of impact loading.
10. A structure according to claim 9, wherein each of said rib members is shaped so that the thickness of said rib member decreases from the base member towards a tip portion of said rib member and is provided with a cut-out section having a width which increases from said tip portion of said rib members towards said base member.
11. A structure according to claim 1 or 2, wherein the width of said rib members increases from a tip portion of said rib members towards the base member.
12. A structure according to claim 1 or 2 having intersecting rib members which are integrally formed with said base member, and protrude in a uniform arrangement,
- said structure absorbing impact energy by deformation of said rib members which are made of a resin, wherein a cut-out section is provided to a designed location of said rib members so as to adjust impact absorptive characteristics of said impact energy absorptive structure.
13. A structure according to claim 12, wherein said cut-out section is formed in accordance with a design on a plane parallel to a direction of expected impact loading.
14. A structure according to claim 13, wherein said cut-out section is provided by removing intersections of lattice points formed by said rib members.
15. A structure according to claim 12, wherein said cut-out section is formed in the direction of expected impact loading.
16. A structure according to claim 13, wherein said cut-out section is provided with a cross sectional area which varies in a designed pattern along the direction of expected impact loading.
17. A structure according to claim 16, wherein said designed pattern is designed so that the cross sectional area of the intersecting rib members increases from a tip portion of said rib members towards the base member.
18. A structure according to claim 17, wherein the width of said rib members increases from said tip portion towards said base member.
19. A structure according to claim 16, wherein said designed pattern is a constant cross sectional area in the direction of impact loading.

*FIG. 1*

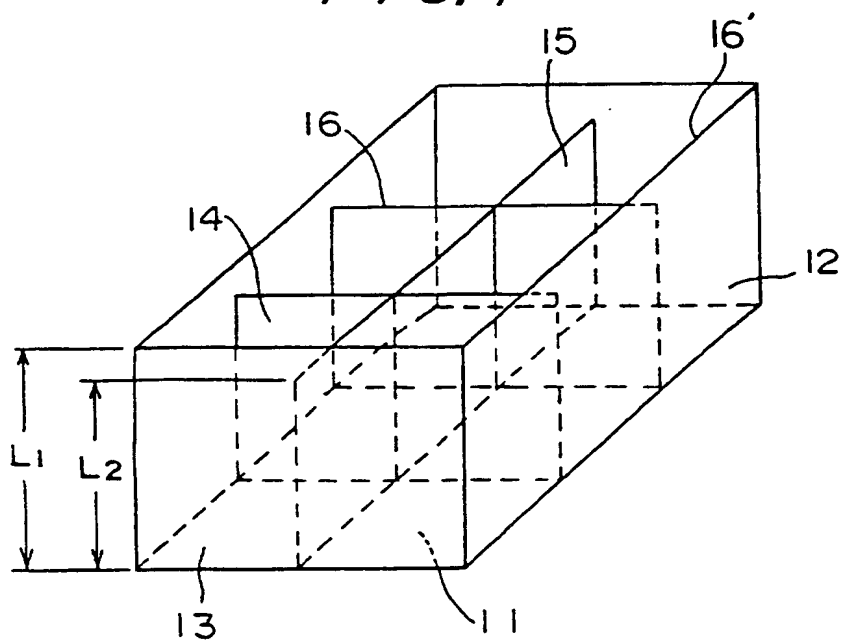

*FIG. 2*

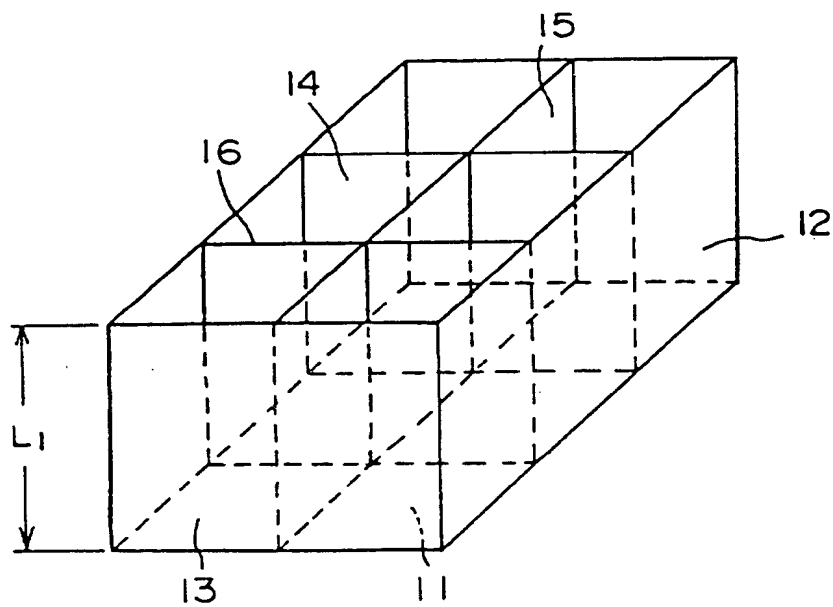


FIG. 3

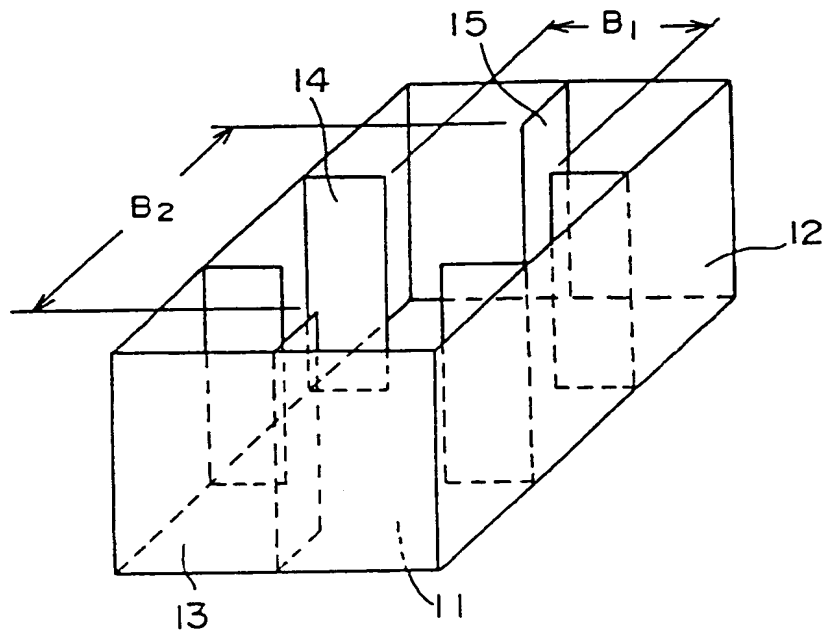


FIG. 4

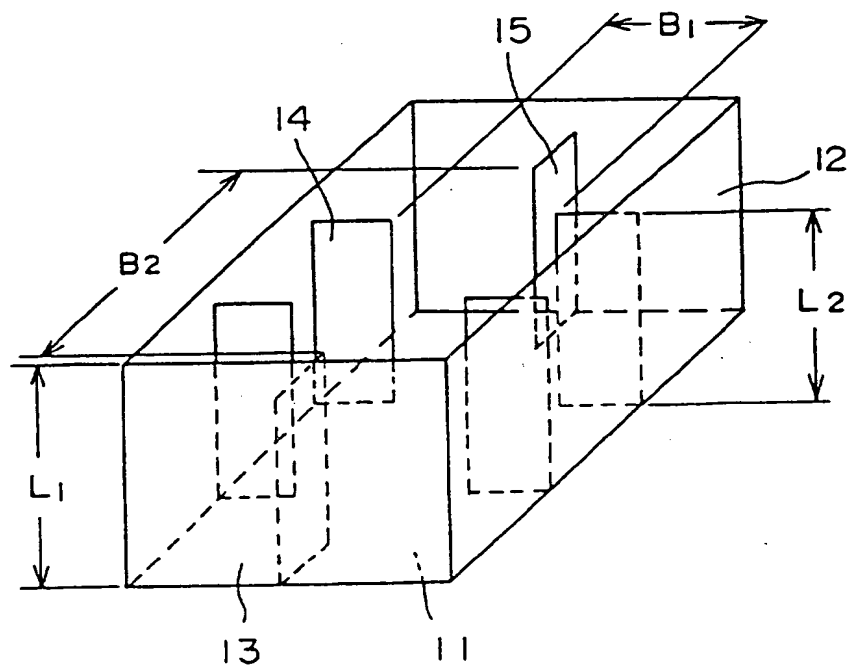


FIG. 5

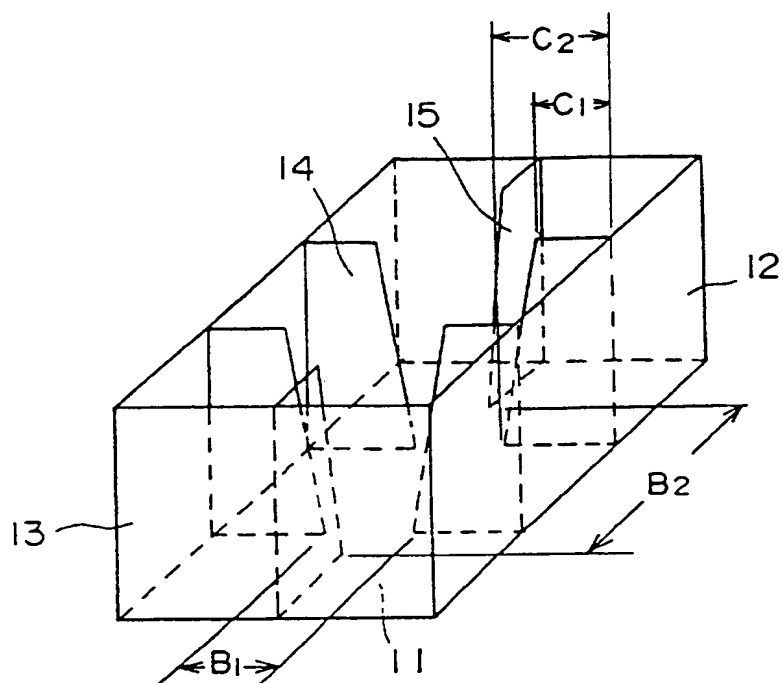


FIG. 6

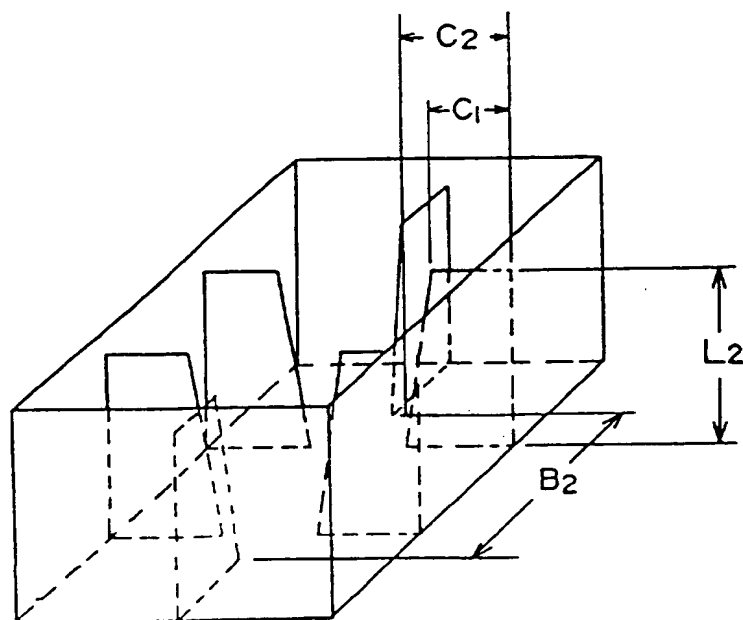


FIG. 7



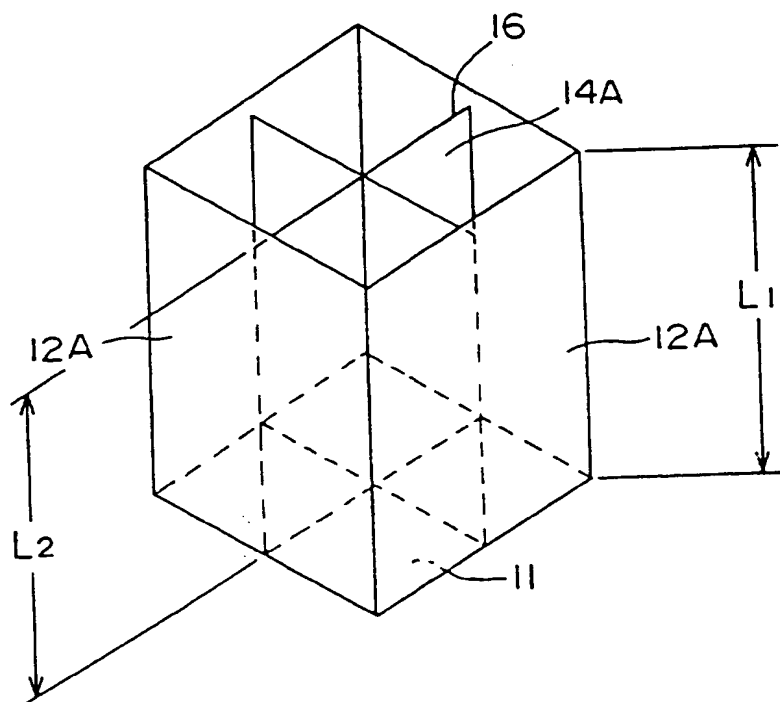


FIG. 8

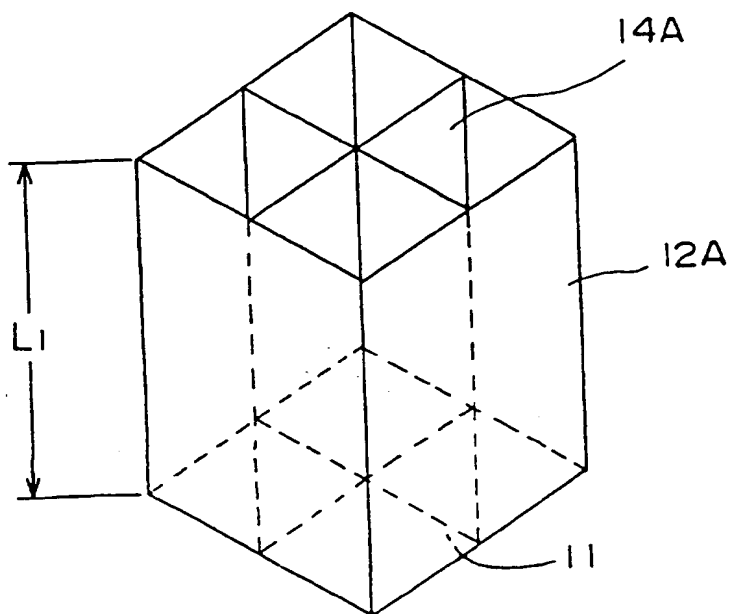

*FIG. 9*

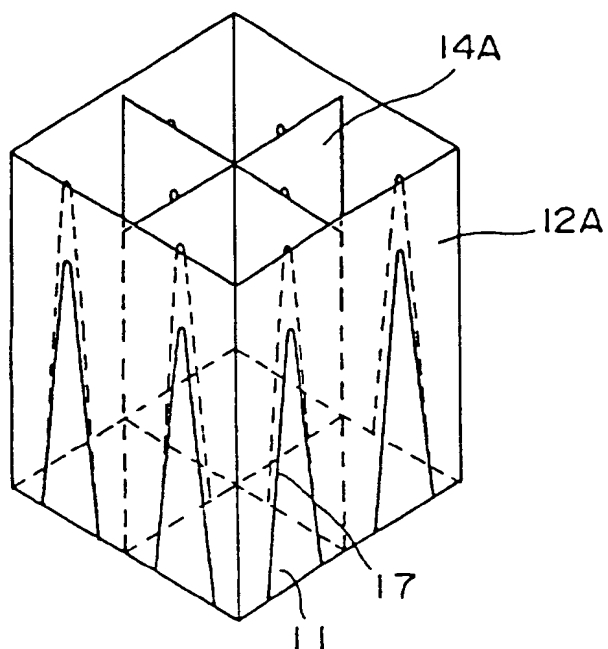

*FIG. 10*



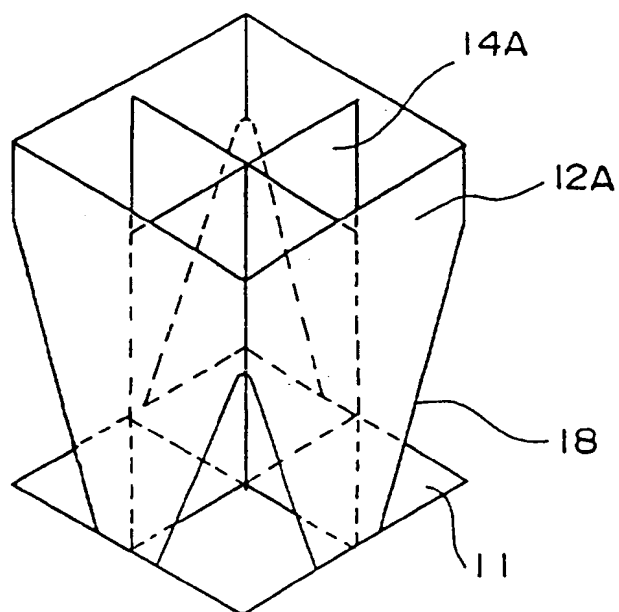




FIG. 11



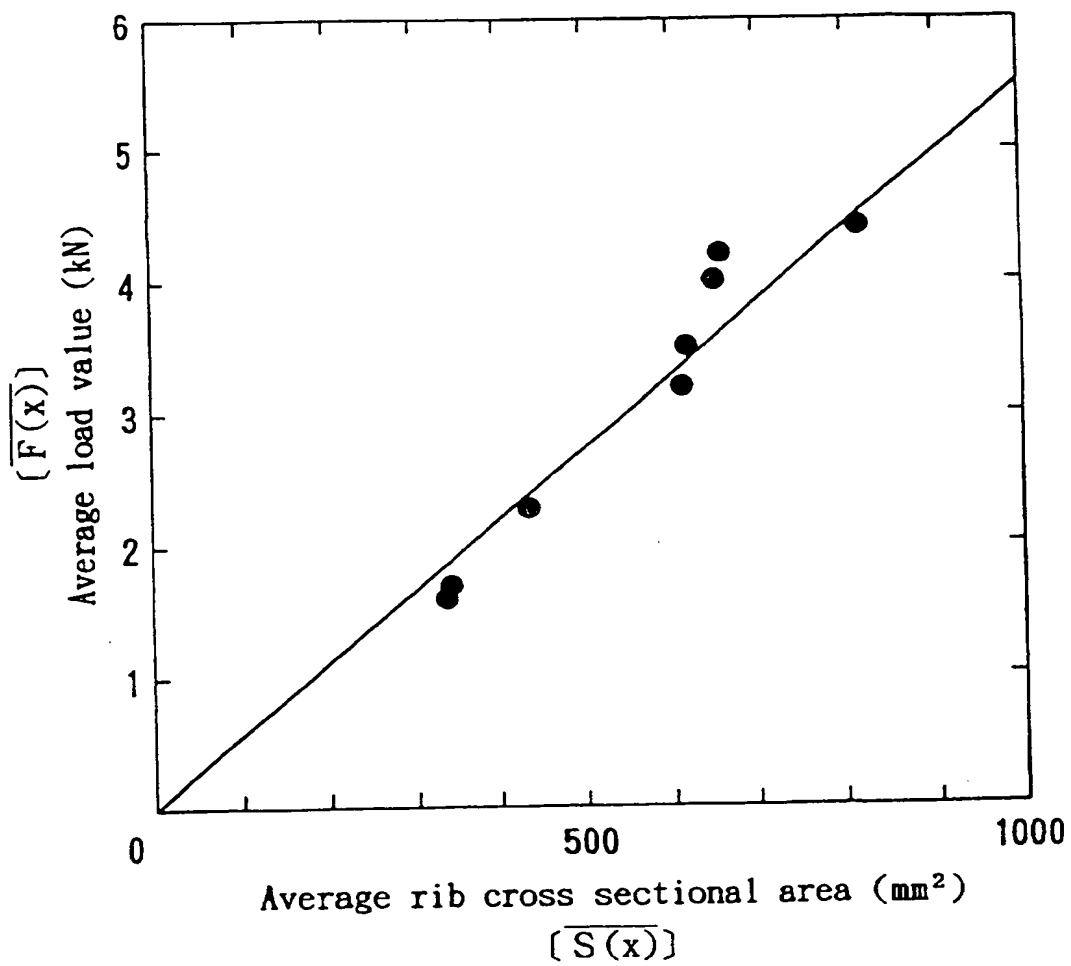



Eur päisch s Pat ntamt  
Eur pean Patent Office  
Office européen d s br v ts



(11) **EP 0 705 994 A3**

(12)

## EUROPEAN PATENT APPLICATION

(88) Date of publication A3:  
12.02.1997 Bulletin 1997/07

(51) Int Cl.<sup>6</sup>: **F16F 7/12**

(43) Date of publication A2:  
10.04.1996 Bulletin 1996/15

(21) Application number: **95307043.0**

(22) Date of filing: **04.10.1995**

(84) Designated Contracting States:  
**DE FR GB IT**

(30) Priority: **04.10.1994 JP 264647/94**  
**22.12.1994 JP 336020/94**

(71) Applicant: **SUMITOMO CHEMICAL COMPANY LIMITED**  
**Osaka-shi, Osaka 541 (JP)**

(72) Inventors:  
• **Togawa, Yoshiaki**  
**Ichihara-shi, Chiba (JP)**

• **Matsumoto, Masahito**  
**Ibaraki-shi (JP)**  
• **Nagata, Makoto**  
**Ichihara-shi, Chiba (JP)**  
• **Yabe, Toru**  
**Ichihara-shi, Chiba (JP)**


(74) Representative: **Senior, Alan Murray**  
**J.A. KEMP & CO.,**  
**14 South Square,**  
**Gray's Inn**  
**London WC1R 5LX (GB)**

### (54) Impact energy absorptive structure

(57) An impact energy absorptive structure is made of plastic materials suitable for moulding processing, and is designed to suit different degrees of impact loading anticipated in various applications. The impact energy absorptive structure is composed of a base member 11 and protruding rib members including long and

short member, in which the proportion of the cross sectional area of the long rib members is between 0.3 to 0.8 of the total cross sectional area of the rib members. Other design modifications can be made readily to customize the impact resistance of the impact energy absorptive structures.

**FIG. 1**

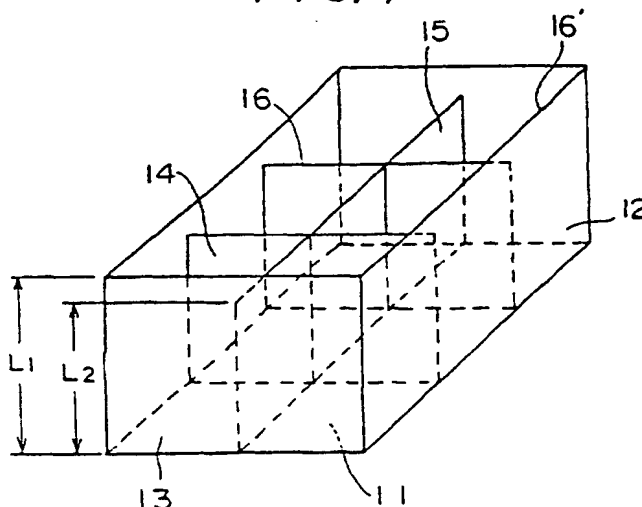



European Patent  
Office

# EUROPEAN SEARCH REPORT

Application Number  
EP 95 30 7043

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (Int. CL. 6)
X	PATENT ABSTRACTS OF JAPAN vol. 007, no. 047 (M-196), 24 February 1983 & JP-A-57 195938 (MITSUI PORIKEMIKARU KK), 1 December 1982, * abstract *	1	F16F7/12
Y		2-4, 6, 7, 9, 12, 13, 15-17, 19	
A		8, 11, 18	
Y	FR-A-2 277 277 (SAAB SCANIA AB) 30 January 1976 * the whole document *	2, 3, 12, 16	
A		5, 10, 14	
Y	FR-A-2 149 827 (MCCORD CORP.) 30 March 1973 * the whole document *	6, 9, 19	
A		2	
P, Y	US-A-5 433 478 (NARUSE YASUMICHI) 18 July 1995 * abstract; claim 6; figures *	7, 17	TECHNICAL FIELDS SEARCHED (Int. CL. 6)
P, A		10	F16F B60R
Y	FR-A-2 698 932 (DIETRICH & CIE DE) 10 June 1994 * page 6, line 28 - page 7, line 2; claim 8; figures *	4, 13, 15	
P, A	US-A-5 431 442 (TOMITA NORIHIRO ET AL) 11 July 1995 * the whole document *	1	
A	US-A-5 326 130 (GEDEON DALE G ET AL) 5 July 1994 * column 3; figure 2 *	1	
	-/--		
The present search report has been drawn up for all claims			
Place of search THE HAGUE		Date of completion of the search 17 December 1996	Examiner Pemberton, P
CATEGORY OF CITED DOCUMENTS		I : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons & : member of the same patent family, corresponding document	
X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : oral-written disclosure P : intermediate document			

EPO FORM 150 (04.92) (P/C/II)



European Patent  
Office

## EUROPEAN SEARCH REPORT

Application Number  
EP 95 30 7043

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (Int.Cl.6)
P,A	DE-A-195 05 935 (TOYOTA MOTOR CO LTD) 24 August 1995 * the whole document *	1	
A	WO-A-89 09349 (BRIGANTINE AIRCRAFT) 5 October 1989 * abstract; figures *	1	
A	AUTOMOTIVE ENGINEERING, vol. 101, no. 5, 1 May 1993, pages 43-47, XP000304014 "DUCTILE THERMOPLASTIC IMPACT STRUCTURES" * the whole document *	1	
A	US-A-5 069 318 (KULESHA RICHARD L ET AL) 3 December 1991		
A	DE-A-44 01 865 (VOLKSWAGENWERK AG) 11 August 1994		
			TECHNICAL FIELDS SEARCHED (Int.Cl.6)
The present search report has been drawn up for all claims			
Place of search THE HAGUE		Date of completion of the search 17 December 1996	Examiner Pemberton, P
<p><b>CATEGORY OF CITED DOCUMENTS</b></p> <p>X: particularly relevant if taken alone Y: particularly relevant if combined with another document of the same category A: technological background O: non-written disclosure P: intermediate document</p> <p>T: theory or principle underlying the invention E: earlier patent document, but published on, or after the filing date D: document cited in the application I: document cited for other reasons</p> <p>&amp;: member of the same patent family, corresponding document</p>			

EPN FORM 1501 01/91 (Pw/Cbl)

**THIS PAGE BLANK (USPTO)**